



KS-852/861 无线网络网关器

提供美食广场、青年旅馆、平价饭店，最方便的投币式无线上网 Kiosk !



VPN Passthrough



iPnP

KS-852
Coin Model

产品特点

- 300M 热点 WLAN 无线网络存取器
- 配备 3 根天线提供无与伦比的高性能
- 支持 100 个使用者同时联机上网
- 符合 IEEE 802.11 b/g/n Wireless LAN 2T3R 网络规范
- 采用 IP plug and play 技术·使用者零设定
- AAA (authentication, authorization and accounting) 网络认证
- 支持 WPA/WPA2, 64/128 bit WEP 数据加密 · layer 2 isolation 提升安全性
- 使用者可远程侦测设备及支持防火墙功能
- 能支持多国语言：英语、法语、德语、义语、俄语、西班牙语
- 营销信息页面·包含 : walled garden、入口页面、客制化登入页面、客制化信息页面及上网付费收据

产品描述

KS-852 硬币型号、KS-862 钞票型号的无线网络网关器 Kiosk 是投币式无线上网的解决方案，提供给店家可连接 xDSL/cable modem，并提供访客立即无线上网的热点服务。

KS-852/862 提供友善的图形使用者接口 (GUI) 给店家可执行初始设定、订义无线上网服务的费用选项，包含 IEEE 802.11 b/g/n 接口、硬币及钞票收集器、热感打印机及两个选择按钮 (打印及语言)。


终端使用者只需投币或纸钞，按下打印钮完成购买，打印上网点数账号信息的收据。当上网时数用完，网络会自动断线，并删除账号。



国内外专利权申请：

美国 US8,010,421 B2, 欧盟 1404056, 日本 3099924, 中华人民共和国 ZL03204640.5, 中华民国 223184

产品应用图

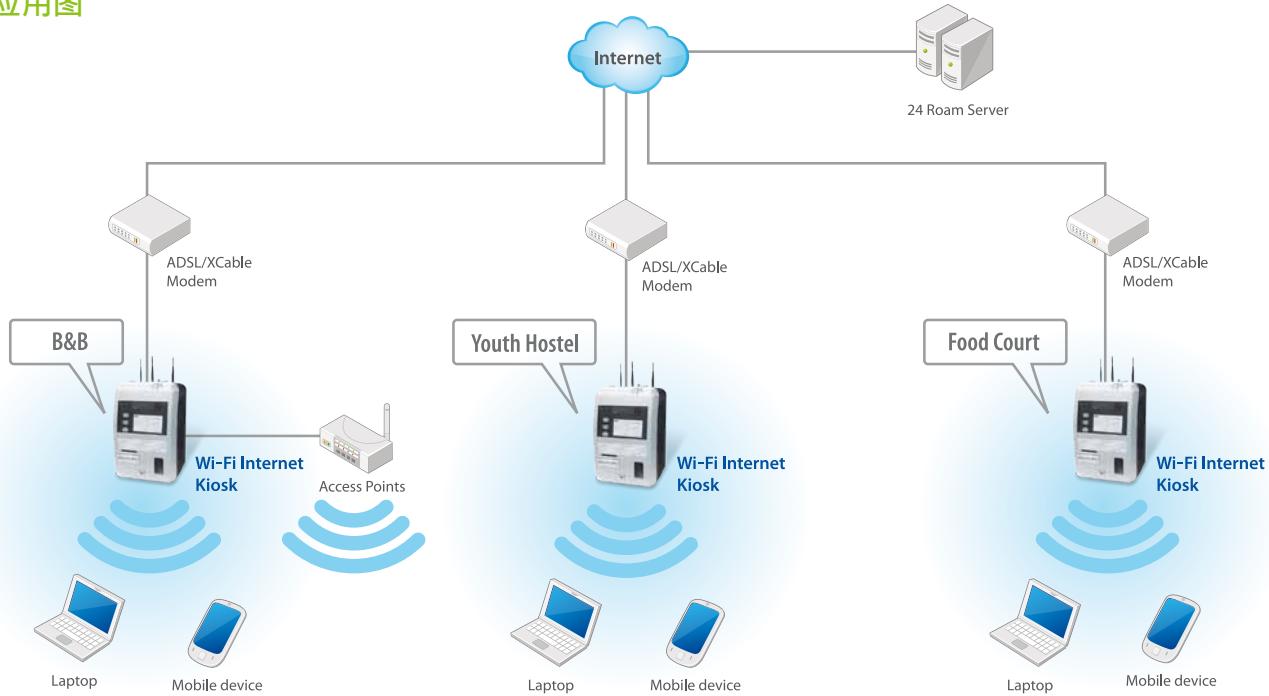

产品规格

网络规格	IEEE802.3 10Base T Ethernet IEEE802.3u 100Base TX fast Ethernet IEEE802.11n Wireless LAN 300Mbps IEEE802.11g Wireless LAN 54Mbps IEEE802.11b Wireless LAN 11Mbps ANSI/IEEE 802.3 NWay auto-negotiation	IEEE 802.11 b/g/n Wireless LAN Supports 100 simultaneous users IP plug and play HTTP proxy support SMTP server redirection DNS redirection DHCP server Static IP WAN client DHCP WAN client PPPoE WAN client PPTP client WAN connection NAT NTP (network time protocol) server support
按键功能	One troubleshooting button Confirm button Language button	Network authentication Web-based login page authentication User authentication and accounting Account log max 5000
天线	2dBi (Max) fixed dual antenna	Interface: serial (RS232C) Paper width: 58mm Paper max diameter: 80mm Printing speed: max 220mm/sec Dot resolution (dots/mm): 8 (203dpi) Dot configuration (dots/line): 432 Cut method: partial cut
无线网络传输范围	Up to 400 feet (outdoor)	Web-based management tool TFTP/HTTP firmware upgrade Wizard setup for step-by-step configuration Backup/Restore/Factory default setting Real-time session list LAN device management System information table E-mail logs
调变方式	802.11b DSSS (DBPSK, DQPSK, CCK) 802.11g OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n OFDM	Walled garden Portal page Customizable log-in pages Customizable information window Customizable ticket (account printout)
无线网络传输速率	802.11b 11, 5.5, 2, 1Mbps 802.11g 54, 48, 36, 24, 18, 12, 9, 6Mbps 802.11n 6.5 to 300Mbps (Follow MCS 0~15 standard) auto fall back with 802.11 b/g	认证
电源需求	External power adaptor Input: 90-264 VAC, 47-63 Hz Output: 24VDC, 5Amp Power consumption: under 120 watts	FCC/ CE/ C-Tick/CSA
尺寸重量	(L): 250m / (W): 290mm / (H): 420mm Weight: about 10kg (net)	
操作环境	Operating temperature: 5°C to 45°C Storage temperature: -10°C to 60°C Humidity: 10% ~ 85% non-condensing 10% ~ 85% condensing	DIN EN ISO 9001
多国语言	LCD message: support English, French, German, Italian, Russian, and Spanish Receipt: support English, French, German, Italian, Russian, and Spanish	
安全及防火墙	Layer 2 isolation security Allow remote user to ping the device IP/MAC/URL address pass through VPN (IPSec/PPTP) pass through WPA/WPA2, 64/128 bit WEP data encryption	

HANDLINK®

澄霖数码科技(上海)有限公司

电话 : +86-21-6457-1608

传真 : +86-21-6457-0656

网址 : www.handlink.com.tw电邮 : shanghai_sales@handlink.com.tw

地址 : 200030 上海市中山南二路1007号1803室 (中煌大厦)

Copyright © 2006-2015 Handlink Technologies Inc. all Rights Reserved.